

MODERN ENGINEERING
REVOLUTIONIZES
TRADITIONAL PRACTICE!

Senninger

Goosenecks and Truss Rod Hose Slings



Reliability

- Non-corrosive, UV resistant thermoplastic construction
- Two-year warranty on materials and workmanship

Several Models

- Senninger 180° goosenecks
- Single 125° goosenecks
- Double 125° goosenecks
- Truss Rod Hose Slings to fit a variety of truss rod sizes





Double 125° Gooseneck

Use only in conjunction with Truss Rod Hose Slings

- 3/4" F NPT inlet x 3/4" hose barb outlets or 3/4" F NPT inlet x 3/4" M NPT outlets
- Attaches to mainline using stainless steel or galvanized nipple or Senninger's impact-modified thermoplastic nipple (*PVC not recommended*)
- Maximum recommended flow 30 gpm (*15 gpm per side*)
- Maximum recommended pressure 120 psi
- Maximum recommended water temperature 110° F (43° C). Ambient temperatures to 150° F (65° C) will not damage Goosenecks.

Double 125° Gooseneck

The Senninger Double 125° Gooseneck combined with Truss Rod Hose Slings creates a system that provides easy installation of additional drops along a center pivot.

- Converts wide spacing machines to closer drop spacings
- Reduces or eliminates the need for welding extra outlets
- Lowers the instantaneous application rate by widening the area of application which reduces soil compaction, soil sealing and runoff
- Easy drop alignment for precision irrigation applications
- Non-corrosive UV-resistant thermoplastic construction for long life and reduced plugging
- Two-year warranty on materials and workmanship



Single 125° Gooseneck

Use only in conjunction with Truss Rod Hose Slings

- 3/4" F NPT inlet x 3/4" hose barb outlet or 3/4" F NPT inlet x 3/4" M NPT outlet
- Attaches to mainline using stainless steel or galvanized nipple or Senninger's impact-modified thermoplastic nipple (*PVC not recommended*)
- Maximum recommended flow 30 gpm
- Maximum recommended pressure 120 psi
- Maximum recommended water temperature 110° F (43° C). Ambient temperatures to 150° F (65° C) will not damage Goosenecks.

Single 125° Gooseneck

The Senninger Single 125° Gooseneck combined with a Truss Rod Hose Sling creates a system that provides easy positioning of drops along a center pivot.


- 125° arch to direct hose toward truss rod
- Drop installation places sprinkler closer to the crop to help fight wind drift and save water
- Lowers the instantaneous application rate by widening the area of application which reduces soil compaction, soil sealing and runoff
- Easy drop alignment for precision irrigation application
- Non-corrosive UV-resistant thermoplastic construction for long life and reduced plugging
- Two-year warranty on materials and workmanship



Double 125° Gooseneck

The Double 125° Gooseneck can either be installed with pressure regulators at the top or lower on the sprinkler drop.


The Double 125° Gooseneck is designed to be used only with Truss Rod Hose Slings. This installation improves instantaneous application rate by increasing the wetted area while using the same amount of water. This reduces soil compaction, soil sealing and runoff.

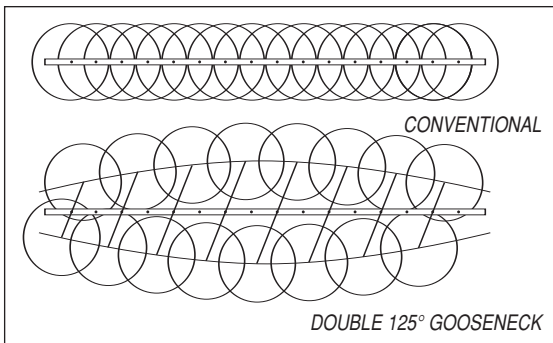

Single 125° Gooseneck


The Single 125° Gooseneck with the 3/4" NPT connection is ideal for installing a pressure regulator at the top of a sprinkler drop. The Single 125° Gooseneck with the 3/4" barb connection is ideal for installing the drop hose onto the Gooseneck and utilizing a pressure regulator closer to the sprinkler.

The Single 125° Gooseneck is designed to be used only with a Truss Rod Hose Sling. This allows the drop hose to hang at a precise location along the truss rod without hindrance or kinking. This installation improves instantaneous application rate by increasing the wetted area while using the same amount of water. This reduces soil compaction, soil sealing and runoff.

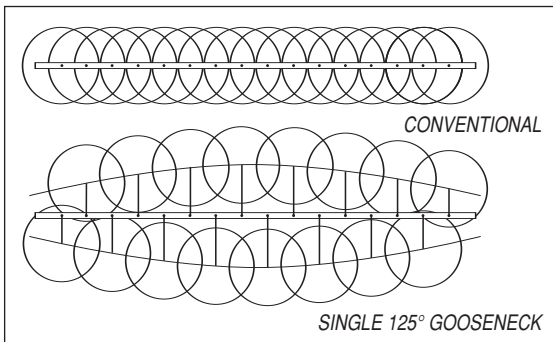

Truss Rod Hose Sling

- Easy to install
- Securely fastens 3/4" flexible hose to the truss rod
- Maintains the drop/sprinkler position and allows for easy adjustments
- Supports flexible hose to prevent kinking and abrasive wear
- Models available for truss rod sizes: 5/8" (rust), 11/16" (green), 3/4" (black), 13/16" (grey), 7/8" (blue)
- Non-corrosive UV-resistant thermoplastic construction for long life
- Two-year warranty on materials and workmanship

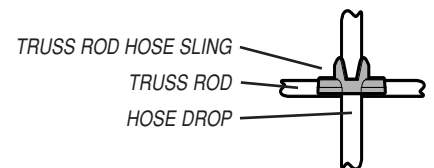




180° Gooseneck

The Senninger 180° Gooseneck provides easy installation of drops along a center pivot allowing sprinkler placement closer to the ground to help minimize wind drift.

- Designed for strength and durability
- Non-corrosive UV-resistant thermoplastic construction for long life and reduced plugging of nozzles
- Light weight for easy handling and lower freight costs
- Two-year warranty on materials and workmanship


Senninger 180° Gooseneck

- 3/4" F NPT inlet x 3/4" hose barb outlet or 3/4" F NPT inlet x 3/4" M NPT outlet
- Maximum recommended flow 30 gpm
- Maximum recommended pressure 120 psi
- Maximum recommended water temperature 110° F (43° C). Ambient temperatures to 150° F (65° C) will not damage Goosenecks.

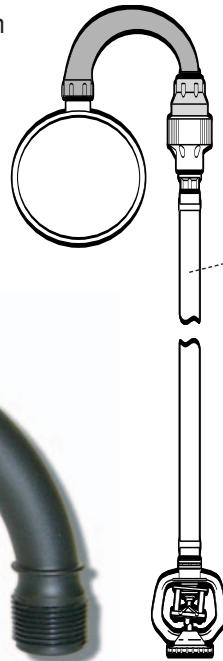

The Senninger 180° Gooseneck must be installed using either a stainless steel or galvanized nipple into the mainline (plastic not recommended).

Flexible hose only (rigid drop pipes not recommended).

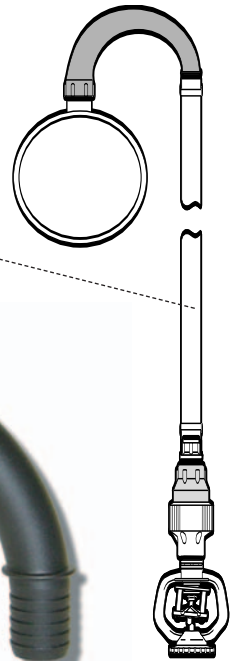

The Senninger 180° Gooseneck with the 3/4" M NPT outlet is ideal for installing a pressure regulator at the top of a sprinkler drop.



The Senninger 180° Gooseneck with the 3/4" barb outlet is ideal for installing the drop hose onto the Gooseneck and utilizing a pressure regulator closer to the sprinkler.

Other Drop Components Available



Stainless Steel, Galvanized & Thermoplastic Nipples



Barb Fittings



3/4" Flexible PVC Hose



Hose Clamps



3/4" Ball Valve



Pressure Drops (standard & freeze proof)